
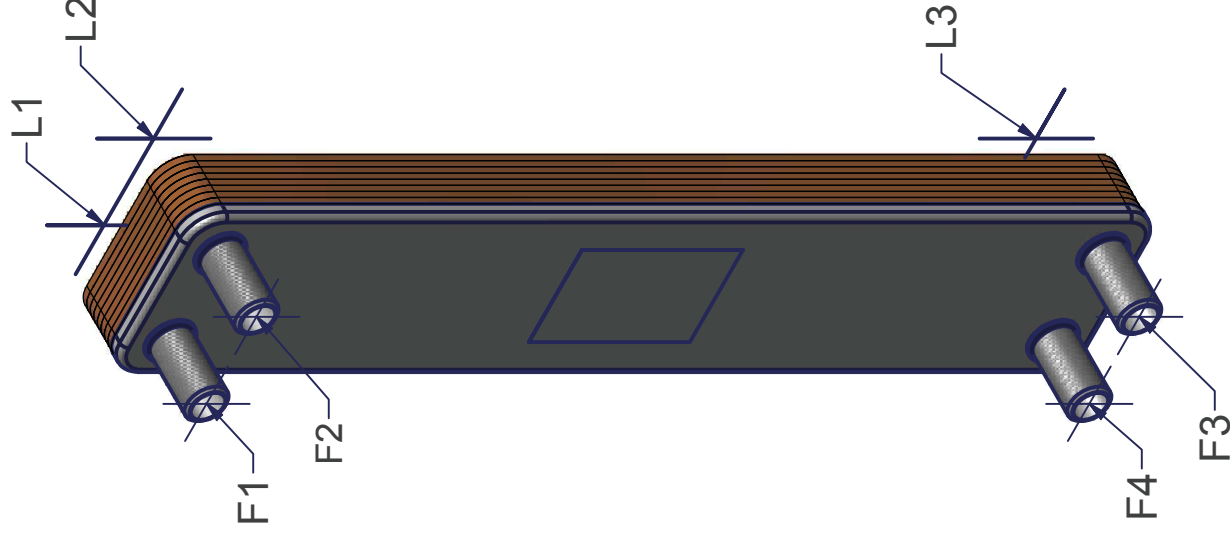


Side 1 Side 2

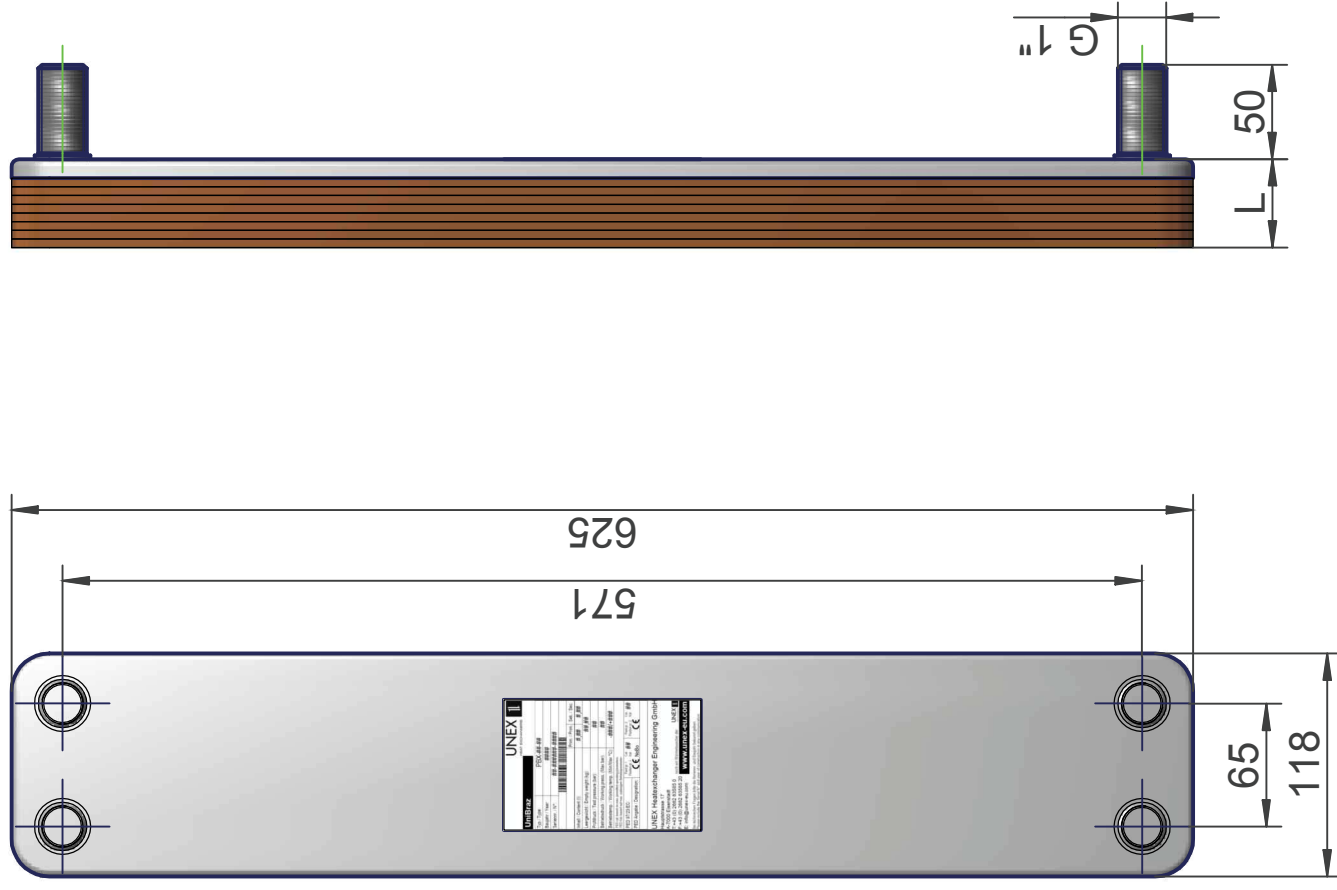

<b>Exchanger connection options</b>	
<b>Standard</b>	G 1" - 50mm long
<b>Alternative</b>	
<b>Other</b>	On request
<b>Additional</b>	On rear positions L1 to L4
<b>Studs &amp; Bolts</b>	On request

<b>Insulation options</b>	Example picture
<b>Aluminium coated PU foam</b> Heating applications to +150°C (Peak)	
<b>Self-adhesive rubberised</b> Cooling applications -50 to +105°C	
<b>Easy-fit shell</b> Heating applications to +135°C	

<b>Mounting options</b>	Example picture
<b>Wall Connection Set</b> Simple, compact & professional mount using the exchanger connections	
<b>Angled Wall Bracket</b> "L" bracket including strap & screws	
<b>Foot Console</b> Robust floor stand to support the weight of the exchanger	

<b>Detachable pipe connection options</b>	Example picture
<b>VER 20</b> From G1" to DN20 weld (2 pcs/set)	
<b>VER 22</b> From G1" to 22 mm solder (2 pcs/set)	
<b>VER 3/4</b> From G1" to 3/4" thread (2 pcs/set)	
<b>VEROR1</b> From G1" to 1" thread - reduction-free (2 pcs/set)	

<b>Where appropriate the following European standards and regulations were used during design and construction:</b>																
97/23/EC (Pressure Equipment Directive)																
EN 1148 (Water to water heat exchangers for district heating)																
EN 10272 (Stainless steel bars used for pressure purposes)																
EN 10028-7 (Stainless steel flat products used for pressure purposes)																
Please ask your sales partner if you require other standards or certification to be applied.																
©2014 Errors, Omissions and Technical Alterations excepted																
Material : 1.4301 (304) / 1.4404 (316L) / Cu 99.9%																
UNEX Heatexchanger Engineering GmbH Hauptstrasse 17 A-7000 Eisenstadt Austria																
www.unex-eu.com info@unex-eu.com Tel: + 43 (0) 2682 635 85 0 Fax: + 43 (0) 2682 635 85 20																
Scale <b>M 1:4 (A3)</b>																
Amount of plates	10	14	20	24	30	34	40	44	50	60	70	80	90	100	110	120
Volume Side 1 (l)*	0.48	0.72	1.08	1.32	1.68	1.92	2.28	2.52	2.88	3.48	4.08	4.68	5.28	5.88	6.48	7.08
Volume Side 2 (l)*	0.60	0.84	1.20	1.44	1.80	2.04	2.40	2.64	3.00	3.60	4.20	4.80	5.40	6.00	6.60	7.20
Max working pressure (bar)	25															
Min / Max temperature (°C)	-10 / +180															
PED Class Group 2 (Category)	SEP															
Plate packet depth L (mm)*	30.0	39.2	53.0	62.2	76.0	85.2	99.0	108.2	122.0	145.0	168.0	191.0	214.0	237.0	260.0	283.0
Net Weight Empty (kg)	5.5	6.5	8.0	9.0	10.5	11.5	13.0	14.0	15.5	18.0	20.5	23.0	25.5	28.0	30.5	33.0
Heat Transfer Area (m <sup>2</sup> )	0.61	0.91	1.37	1.67	2.13	2.43	2.89	3.19	3.65	4.41	5.17	5.93	6.69	7.45	8.21	8.97
* Calculated values (final tolerance to ISO 2768-m)																

Status	Change	Date	Name
Drawn by	13.08.2014	MPI	Name
Checked by	09.10.2014	DRO	Name